


Alloy Valves and Control

### METER RUNS

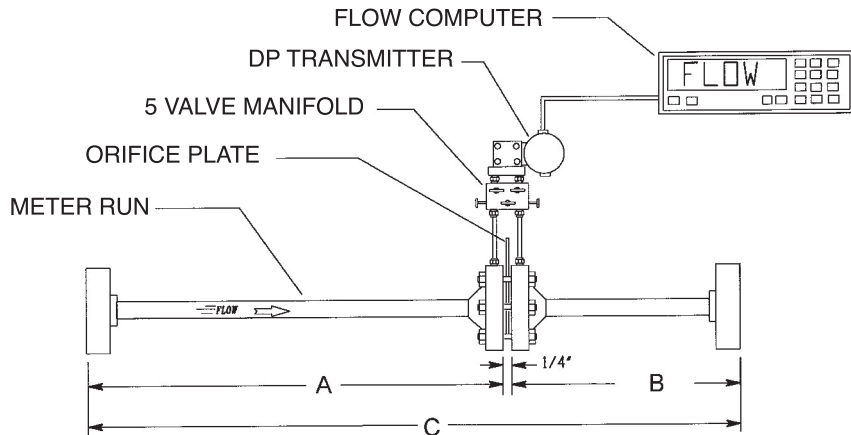

AVCO fabricated Meter Runs are required to assure flow measurement accuracy. Meter Runs are fabricated from pipe that is selected for diameter, roundness and straightness. The internal welds are ground flush to the line I.D., per the requirements of AGA and ASME. The up and down lengths are sufficient to produce ideal flow profiles for proper flow measurement.

### METER RUNS (2"-12")

SIZE	A	B	C	S/40 I.D.	S/80 I.D.
2"	5'-0"	3'-0"	8'-1/4"	2.067"	1.939"
3"	6'-0"	4'-0"	10'-1/4"	3.068"	2.900"
4"	8'-0"	4'-0"	12'-1/4"	4.026"	3.826"
6"	12'-0"	5'-0"	17'-1/4"	6.065"	5.761"
8"	14'-0"	5'-0"	19'-1/4"	7.981"	7.625"
10"	19'-0"	6'-0"	25'-1/4"	10.020"	9.564"
12"	21'-0"	7'-0"	28'-1/4"	11.938"	11.376"